



PASSENGER LIFTS
mpgo! Evolution



FEATURES

TYPE:	Gearless Lift
SUSPENSION:	2:1
LOAD:	320 kg to 1600 kg
CAPACITY:	4 to 21 persons
SPEED:	1.0 - 1.6 m/s (Optional 2,5 m/s from 8 to 21 persons)
TRAVEL RANGE:	Up to 50 m
STOPS:	16 stops
ENTRANCES	Single entrance and double 180° entrance
SERIES:	"S" Machine room less

CAR

MODEL:	D-100 with curtain photocell Jamb arrow direction (Optional: other car models, see catalogues)
EXTERIOR DIMENSIONS:	See table
HEIGHT:	2100 mm (Optional: other heights)

CAR DOORS

TYPE:	TYPE: Automatic: 2 side-opening panels. 3VF (Optional: other models)
FINISH:	Stainless steel (XO2)
DIMENSIONS:	See table x 2000 mm (Optional: other heights)

LANDING DOORS

TYPE:	Automatic: 2 side-opening panels (Optional: other models)
FINISH:	Epoxy RAL 7044
DIMENSIONS:	See table x 2000 mm (Optional: other heights)
FIRE CLASSIFICATION ACCORDING TO EN 81-51:	E120, EW60 (Optional: other classifications)

SHAFT

DIMENSIONS:	See table
PIT:	See table
HEADROOM:	See table

CAR OPERATING PANEL

MODEL:	Full-height
FINISH:	Plastic coated steel (Optional: Stainless steel XO2)
PUHSBUTTON:	Mechanical, polycarbonate plastic, fireproof pushbutton lit up with Leds (Optional: Mechanical, stainless steel pushbutton with halo lighting)
CAR INDICATOR:	2 digit display with Leds made up of 7 segments (Optional LCD and TFT display)
SAFETY:	Emergency light and telephone

LANDING OPERATING PANEL

MODEL:	P001, door frames
FINISH:	Stainless steel plate (XO2)
PUHSBUTTON:	Mechanical, polycarbonate plastic, fireproof pushbutton lit up with Leds (Optional: Mechanical, stainless steel pushbutton with halo lighting)
ENGRAVING:	Black logo (done with laser)

CONTROLLER

TYPE:	Via Serie controller and DSP inverter. Down collective or pick-up
CONTROLLER CABINET:	"S" series: On the highest floor. (Optional: cabinet may be located on any floor) Epoxy finish

ELECTRIC INSTALLATION

	Pre-assembled with "Plug & Play" connectors
--	---------------------------------------------

MACHINE

	Gearless. Permanent maGO magnets With thermal safety cover for motor. Rescue operation: Automatic rescue in addition to emergency electrical controller
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------

BUFFERS

	Made from polyurethane with a metal pedestal included
--	-------------------------------------------------------

GUIDE RAILS

	Cold-Drawn / Machined In accordance with ISO 7465 Bracketed
--	-------------------------------------------------------------------

FIXINGS


	Fixing brackets and plugs for enclosure
--	-----------------------------------------

ELECTRICAL FEATURES


POWER SUPPLY VOLTAGE:	380 V three-phase (Optional: 220 V, 400 V, 415 V three-phase)
LIGHTING VOLTAGE:	220 V
FREQUENCY:	50 Hz (Optional: 60 Hz)

NOTE: Specifications correspond to the basic rate model.


DIAGRAM

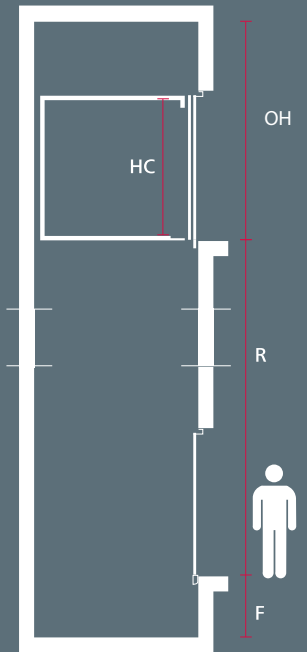

STANDARD ENTRANCE



DOUBLE 180° ENTRANCE





	S SERIES															
	MP410GO!	MP510GO!	MP610GO!	MP616GO!	MP810GO!	MP816GO!	MP1010GO!	MP1016GO!	MP1310GO!	MP1316GO!	MP1510GO!	MP1516GO!	MP1710GO!	MP1716GO!	MP2110GO!	MP2116GO!
Capacity (persons)	4	5	6	6	8	8	10	10	13	13	15	15	17	17	21	21
Speed (m/s)	1	1	1	1,6	1	1,6	1	1,6	1	1,6	1	1,6	1	1,6	1	1,6
Starts per hour	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180
Power (HP / kW)	4 / 3	4 / 3	5,4 / 4	10,8 / 8	6,75 / 5	10,8 / 8	8,1 / 6	17,3 / 12,8	9,5 / 7	17,3 / 12,8	10,8 / 8	17,3 / 12,8	10,2 / 7,6	17,7 / 13,1	19 / 14,2	27,7 / 20,6
Current rating (A)	9,1	9,6	11,2	22,8	14,1	22,8	17,3	34,9	17,6	34,9	21,3	31	29,7	33	42	53,5
Q payload capacity (kg)	320	375	450 / 480	450 / 480	630	630	750 / 800	750 / 800	1000	1000	1125	1125	1275	1275	1600	1600
PL Clear entrance (mm)	700	700	800	800	900	900	900	900	900	900	1000	1000	1000	1000	1100	1100
AC Car exterior width (mm)	800	950	1000	1000	1100	1100	1200	1200	1100	1100	1200	1200	1200	1200	1400	1400
FC Car exterior depth (mm)	1100	1050	1250	1250	1400	1400	1500	1500	2100	2100	2150	2150	2300	2300	2400	2400
HC Car useful height (mm)	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100
AH shaft width (mm)	1350	1450	1500	1500	1600	1600	1700	1750	1600	1650	1700	1750	1800	1800	2000	2000
FH shaft depth (mm)	1350	1350	1500	1600	1650	1650	1750	1750	2350	2350	2400	2400	2700	2700	2750	2750
F Pit (mm)	1025	1025	1025	1155	1025	1155	1025	1300	1025	1400	1025	1400	1200	1400	1200	1400
OH Headroom (mm)	4400	4400	3400	3600	3400	3600	3400	3650	3400	3650	3400	3650	3400	3650	3400	3650
No. of ropes and diameter (mm)	4 x 6,5	5 x 6,5	5 x 6,5	5 x 6,5	6 x 6,5	6 x 6,5	7 x 6,5	7 x 6,5	8 x 6,5	8 x 6,5	9 x 6,5	9 x 6,5	9 x 6,5	9 x 6,5	9 x 8	9 x 8
Distance between brackets (mm)	1500 / 3000	1500 / 3000	1500 / 3000	3000	1500 / 3000	3000	1500 / 3000	3000	1500 / 3000	3000	1500 / 3000	3000	1500 / 3000	3000	1500 / 3000	3000
Car guide rail (sections of 5 m)	70 / 65 / 9	70 / 65 / 9	70 / 65 / 9	90 / 75 / 16	70 / 65 / 9	90 / 75 / 16	70 / 70 / 9	90 / 75 / 16	70 / 70 / 9	90 / 75 / 16	89 / 62 / 16	90 / 75 / 16	120 / 76 / 9	120 / 76 / 9	90 / 75 / 16	125 / 82 / 16
Counterweight guide rail (sections of 5 m)	50 / 50 / 5	50 / 50 / 5	50 / 50 / 5	70 / 70 / 9	50 / 50 / 5	70 / 70 / 9	65 / 54 / 8	70 / 70 / 9	70 / 70 / 9	70 / 70 / 9	70 / 70 / 9	70 / 70 / 9	70 / 70 / 9	70 / 70 / 9	65 / 54 / 8	70 / 70 / 9
Suspension	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1	2:1
Shaft enclosure	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete	Concrete
Design dossier	ACIN3 2010	ACIN3 2010	ACIN3 2010	ACIN3 2010	ACIN3 2010	ACIN3 2010	ACIN3 2010	ACIN3 1000	ACIN3 2010	AC2050-18	ACIN3 2010	AC2050-18	AC2050-18	AC2050-18	AC2050-18	AC2050-18

- Fixings every 1500 mm: V=1,0 m/s. Optional: fixing brackets every 3000 mm.
- Fixings every 3000 mm: V=1,6 m/s.
- Start-up current = 1.8 * Rated current.
- Height of doors 2000 mm.
- The number of ropes depends on the total weight of the lift.

PRODUCT OPTIONS:

- Reduced overhead of up to 2900 mm. In overheads less than 3400 through to 2900 mm, the level of safety required in EN 81-21. For 4 passengers, consult about feasibility.
- Reduced pit of up to 695 mm. In pits less than 1050 through to 695 mm, the level of safety required in EN 81-21. For 4 passengers, consult about feasibility.
- Adaptable to single-phase mains up to 6 passengers and Rated speed 0.5 m/s.
- Safety gear on counterweight for all models. From 4 to 6 passengers, consult about feasibility.
- All models can be adapted to modular structures. Consult about feasibility.
- Optional: V=2,5 m/s. Please ask us for more information..

NOTE: The values included in this table correspond to pre-established conditions and may be modified, according to the specific characteristics of each installation.